




ICT Key Fob Battery Replacement

This guide provides steps for replacing the...

Written By: Nichita Bailuc

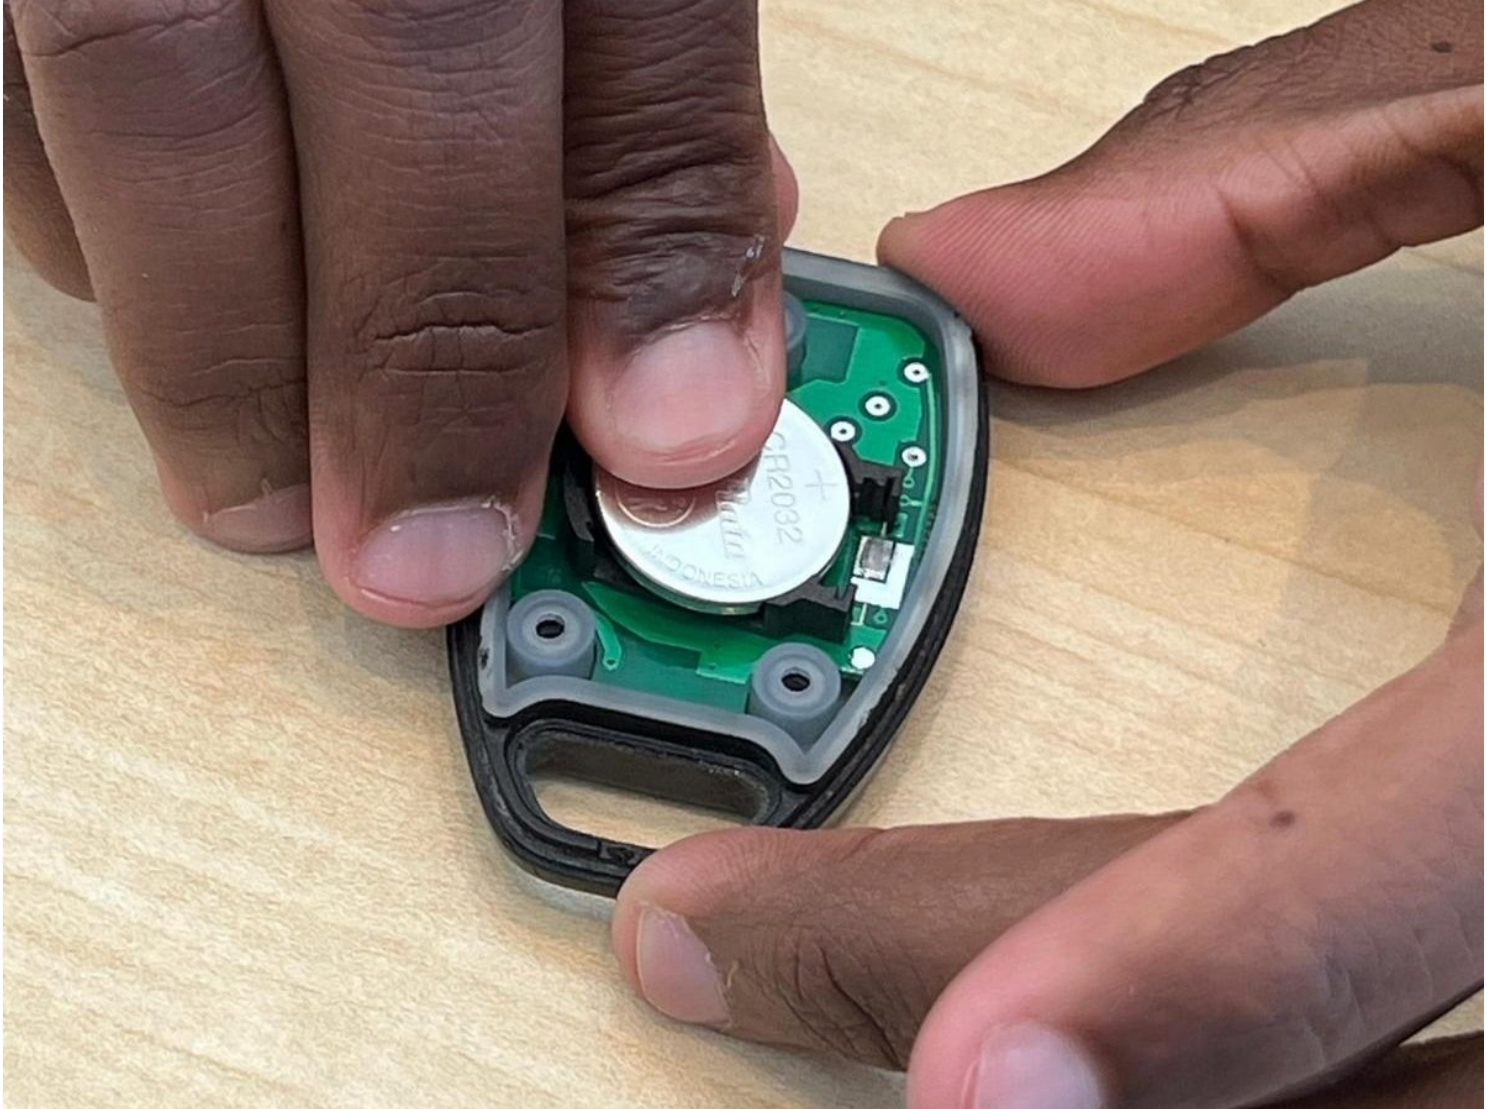

INTRODUCTION

This guide provides steps for replacing the battery in a wireless radio frequency (RF) key fob remote for a car or home alarm system. Specifically, it covers the ICT **RF-REM2-433** model key fob, which uses a replaceable CR2032 3V coin cell battery.

Replacing the battery can restore function if the key fob can no longer lock/unlock car doors or arm/disarm an alarm system. The process takes about 10-15 minutes and requires a new CR2032 battery and a Phillips #00 screwdriver.

TOOLS:

[Phillips #00 Screwdriver](#) (1)
[iFixit Opening Tool](#) (1)

PARTS:


[CR2032 Lithium Battery](#) (1)

Step 1 — Battery



- Place the key fob so that the back panel is facing up.

Step 2

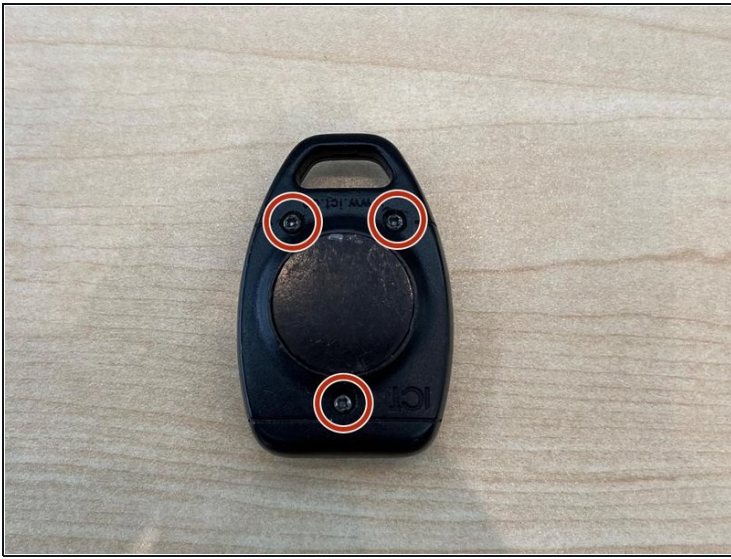

- Use the Phillips #00 screwdriver to remove three screws securing the battery compartment cover.
- ⓘ If there are no visible screws, the cover may be held in place by clips or a sliding mechanism.
- Carefully open the compartment using a small tool if necessary.

Step 3



- ★ Take note of the battery's orientation (positive terminal up) before removing it to ensure you insert the new battery correctly.

Step 4




- Gently slide the battery out or lift it using an iFixit opening tool.

Step 5



- Insert the new battery into the battery compartment, making sure to align it with the correct polarity (+ and -).

Step 6

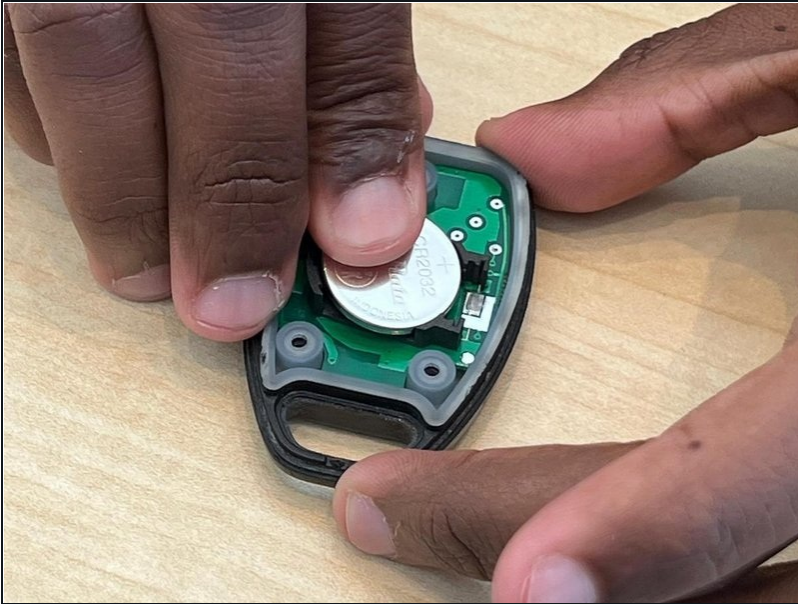

- Press the new battery firmly into place to ensure a secure connection.

Step 7



- Put the battery compartment cover back in place by tightening the three screws using a Phillips #00 screwdriver.

Step 8



- Press a button on the keyfob to ensure it's working properly with the new battery.
- ⓘ If the keyfob doesn't respond, double-check the battery orientation and try again.

If the correct battery type was used (and installed with the correct polarity in mind), the fob should now function. If the fob still does not function, the circuit board may be broken.

To reassemble your device, follow these instructions in reverse order.

NOTE:

Remember to dispose of the old battery properly according to local regulations. If you encounter any difficulties or if the keyfob doesn't function correctly after replacing the battery, it's recommended to contact the manufacturer or seek professional assistance.